

Part Number: K-H2-SX-G(E)
Description: Gunfighter Saddle
Fitment: 2018-2025 Kawasaki H2 SX
Revision: 2



Tools Required	Parts List
Phillips Screwdriver or 10mm Combination Wrench	1 Wiring Harness Fuse Link 12" 1 Zip Tie 1 #A00520 Loop Latch Bracket 1 #P11374 Pin Latch Bracket

1. To install your new Corbin saddle, you're first going to have to remove the stock seat. Refer to your owner's manual if necessary.

2. Install the included pigtail. This is a one time installation that can stay on the bike even when you remove the saddle.

3. Included with your electric heated seat you will find a short wiring pigtail with built in fuse. Installation of this pigtail is simple and mounts directly to your battery.

4. Connect as follows:

- Disconnect negative lead from battery (*Figure 1*).
- Disconnect positive lead from battery (*Figure 2*) and reinstall along with red (fuse) lead from pigtail (*Figure 3*).
- Reconnect negative lead along with black lead of pigtail (*Figure 4*).
- Assure both terminals are tightened securely.

5. Bundle loose wiring and secure with the included zip tie (*Figure 5*). Do not tighten excessively or you may damage the wiring... just secure it in place for cleanliness.

6. Next, plug the pigtail into the seat wiring (*Figure 6*). Turn the ignition switch on and flip on the seat heater. If the heater switch illuminates, then your wiring is fine and you're ready to move



FIG 1



FIG 2



FIG 3



FIG 4


on.

NOTE: Saddle features a digital timer to automatically shut down the heater after one-hour in case it is forgotten when parking the bike.

7. To install your Gunfighter Saddle, simply slide the saddle into place nose first to engage the tongue, lower the rear into place and push firmly on the passenger platform to latch (*Figure 7*).

NOTE: We include two different latch brackets. Early models use the loop type latch, while 2022 and up models use the pin style (*Figure 8*).

Enjoy your new saddle!

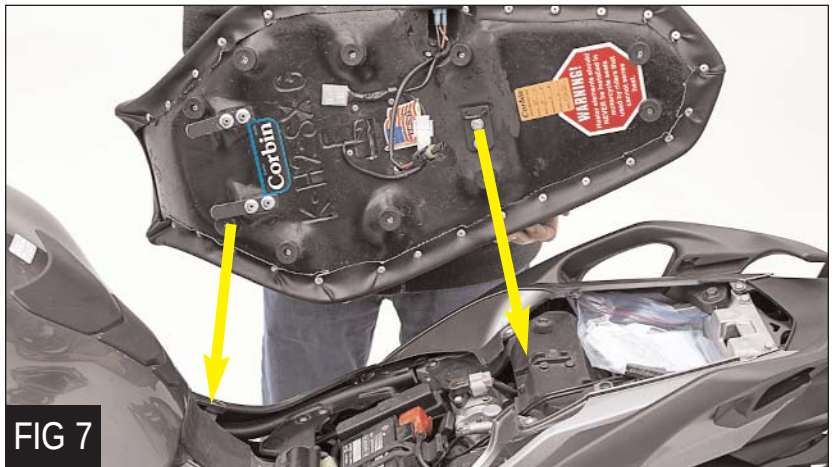

Questions? Give us a holler...
800-223-4332
tech@corbin.com